




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, Yonkers, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

**MODEL №:** 64623

**ISSUED:** JAN 1987

**REVISED:** 20 APR 2022

**RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE**

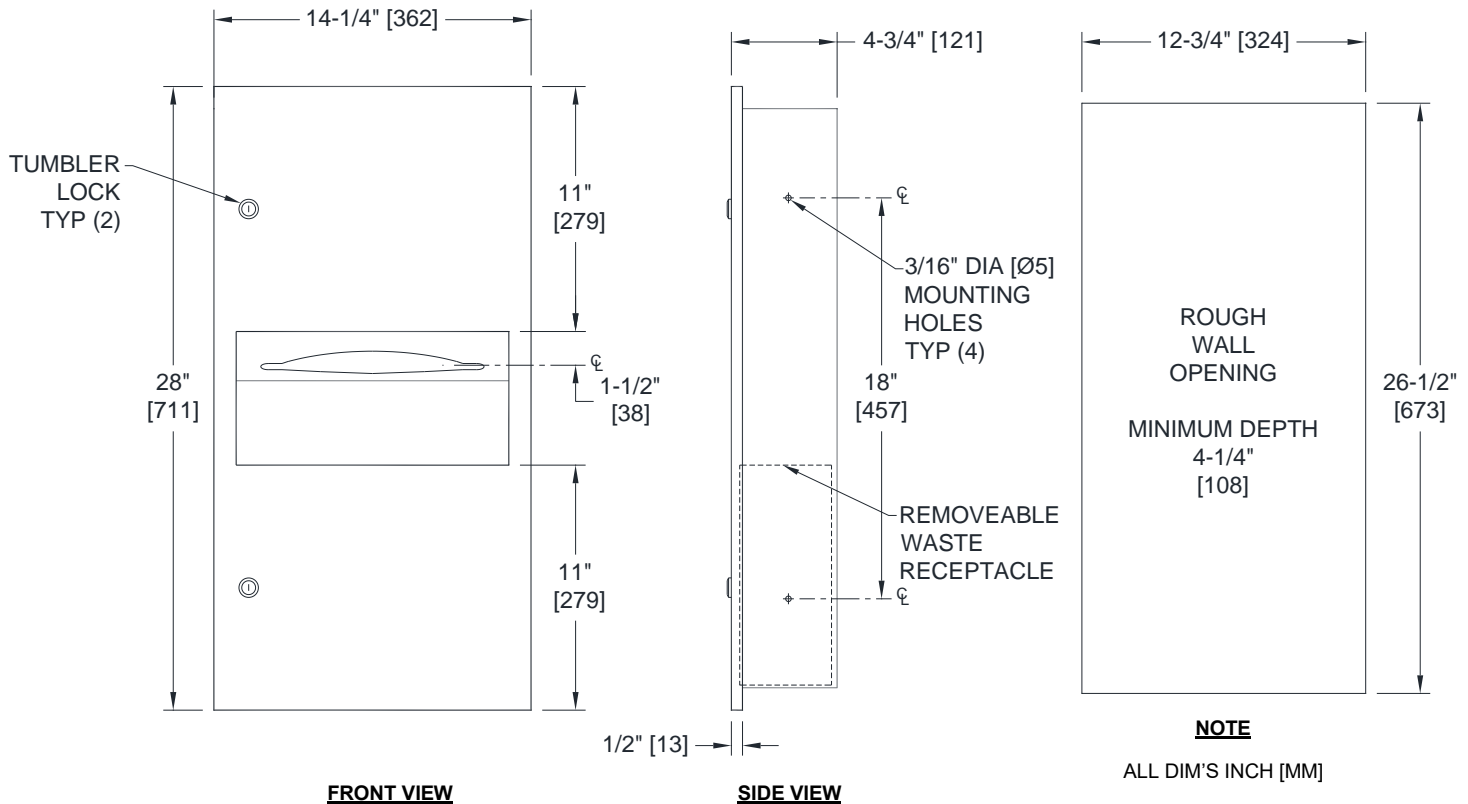

**NOTE**

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**SPECIFICATION**

Recessed Paper Towel Dispenser and Waste Receptacle shall hold and dispense 475 standard multi-fold or 350 standard C-fold paper towels and shall have a waste capacity of 2.2 gal. (8.4L). Cabinet, door, dispenser, and waste receptacle shall be fabricated of alloy 18-8 stainless steel, type 304. Cabinet shall be 20 gage with a 1" [25] wide perimeter trim to lay flush against wall and shall have no exposed fastening devices. All exposed surfaces shall be satin (or Powder Coated (PC) Matte Black finish if suffix -41 is added to Model №) finish protected by a PVC film easily removable after installation. Door shall be № 18 gage and shall be attached to the cabinet body with a full length 3/16" Dia [Ø4,8] stainless steel multi-staked piano hinge, and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. Towel dispensing slot shall have a fully deburred edge for snag free dispensing and user safety. Waste receptacle shall have a rolled edge finger hole for easy servicing and removal.

**Recessed Paper Towel Dispenser and Waste Receptacle shall be Model № 64623 (add -41 for PC Matte Black) as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913**

**INSTALLATION**

Mount unit in wall recess with № 10 self-threading flat, oval or pan head screws (by others) through concealed mounting holes provided. Note that top of Rough Wall Opening is 3/4" [19] below top of unit. For compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards install unit so that center line of towel dispenser slot is 48" [1219] Maximum Above Finished Floor.

**RWO required is 12-3/4" [324] W X 26-1/2" [673] H X 4-1/4" [108] D Min**

**OPERATION**

Towels are self-feeding until supply is depleted. Unit will continue to feed properly when reloaded with a partial load in place. Waste receptacle is emptied manually on a cycle determined by maintenance needs. Locked door prevents unauthorized access or removal.