




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 6474

ISSUED: JAN 1987

REVISED: 28 APR 2022

RECESSED WASTE RECEPTACLE

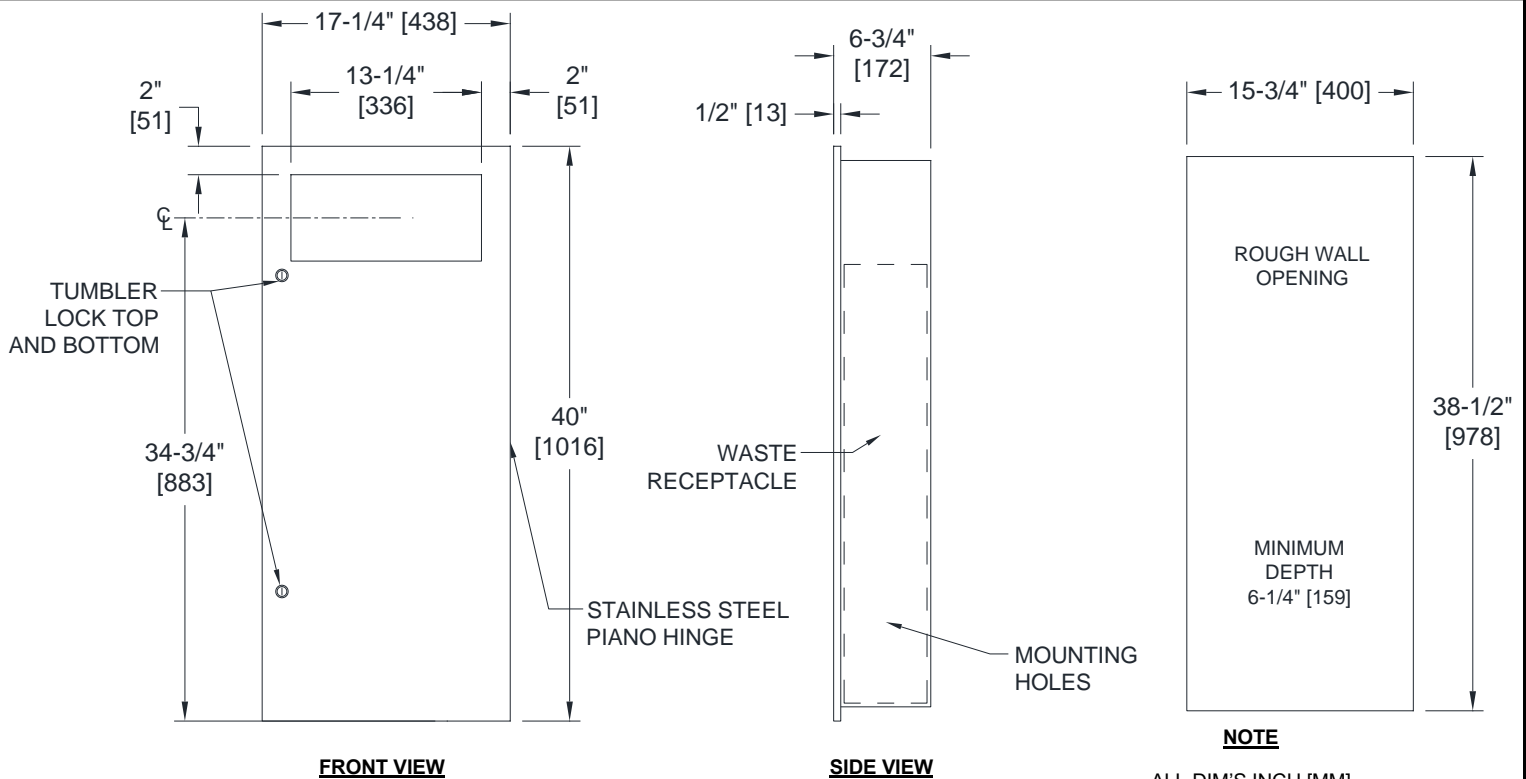

NOTE

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION

Recessed Waste Receptacle unit shall have a waste capacity of 12 gal (46L) and shall be alloy 18-8 stainless steel, type 304. Full face door shall be fabricated from one piece of 18 gage and shall be free of miters, welding or open seams on face and shall have a 1/2" [13] square return to wall and shall be attached to the edge of unit with a full length 3/16" Dia [Ø4,8] stainless steel multi-staked piano hinge and shall be held closed with two (2) tumbler locks keyed alike to other ASI washroom equipment. Cabinet shall be 20 gage and shall have a 1" [25] wide perimeter trim to lay flat against wall. Waste container shall be fabricated of heavy duty stainless steel with a finger grip for easy removal. All exposed surfaces shall be satin finish (or Powder Coated (PC) Matte Black finish if suffix -41PC is added to Model №) and shall be protected during shipment with a PVC film that shall be easily removable after installation.

Recessed Waste Receptacle shall be Model № 6474 (add -41PC for Matte Black) as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, NY 10701-4913

INSTALLATION

Mount unit in wall recess with № 10 self-threading flat, oval or pan head screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards install unit so that center of the waste receptacle opening is 48" [1219] Max Above Finished Floor (AFF).

RWO required is 15-3/4" [400] W x 38-1/2" [978] H X 6-1/4" [159] D Min

OPERATION

Waste is inserted through opening at upper section of unit. Waste container is emptied manually on cycle determined by maintenance needs. Locked door prevents unauthorized access or removal.