




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 0356

ISSUED: 01-87

REVISED: 11 APR 2019

SURFACE MOUNTED LIQUID SOAP DISPENSER (PUSH-UP TYPE)

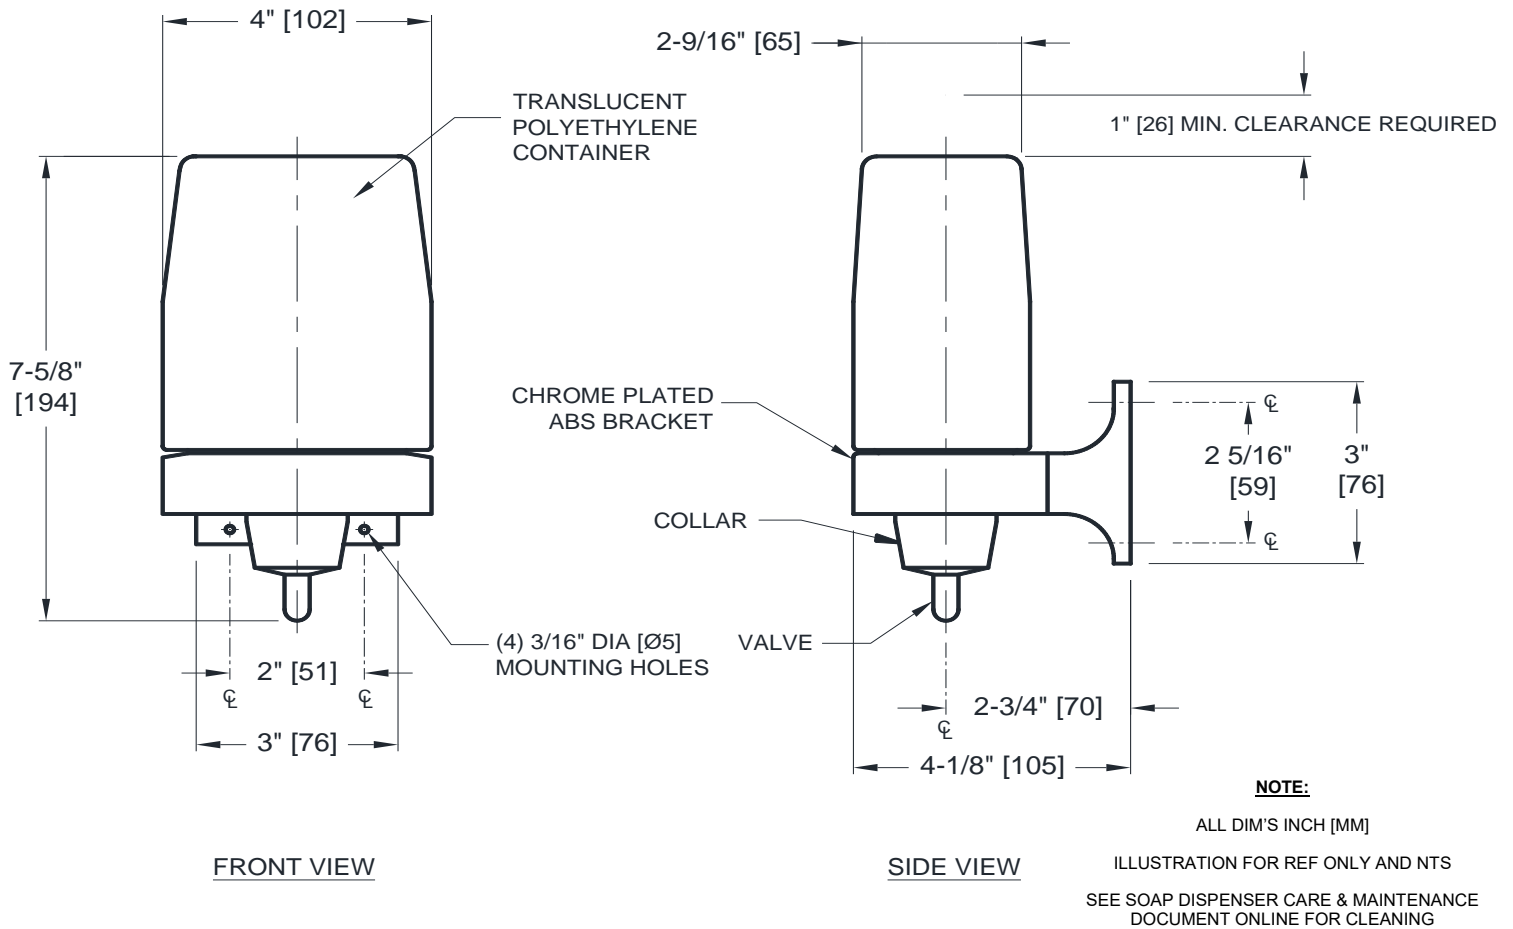

SPECIFICATION

Surface Mounted Liquid Soap Dispenser (Push-up type) shall hold and dispense 24 oz (0.7 L) of liquid soap, lotion or detergent having a pH in range 7 ± 1.5 and viscosity in range 150-3000 cPa (mPa•s). Soaps containing reportable salts, chlorides and alcohols should be avoided. Unit shall be tamper resistant, chrome plated ABS plastic, a translucent white polyethylene soap container, and a corrosion resistant ABS dispensing valve with stainless steel spring. Valve operation shall comply with 2010 ADA Accessibility Standards and ICC/ANSI A.117.1 by requiring no more than 5lbs_f (22.2 N) pressure to actuate and require no grasping or twisting by operator.

Surface Mounted Liquid Soap Dispenser (Push-up type) shall be Model № 0356 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Secure unit bracket to wall or partition using four (4) № 10 pan head self-threading screws (supplied). Container is secured to bracket with a threaded collar. For compliance with 2010 ADA Accessibility Standards install unit so that bottom of unit is 48" [1219] maximum above finished floor (AFF). For general utility install unit 42" [1066] AFF or 8" [203] minimum above counter top.

OPERATION

A measured amount of soap is manually dispensed by pushing-up against valve. Unit can be reloaded by unscrewing collar at base and removing soap container. Soap will continue to feed properly until empty. Tank supply is replenished manually on cycle determined by maintenance needs.