




AMERICAN SPECIALTIES, INC.
441 Saw Mill River Road, NY 10701
(914) 476.9000 • (914) 476.0688
www.americanspecialties.com

MODEL №: 20826-T

ISSUED: 06/10

REVISED:

ROVAL™ SURFACE MOUNTED WASTE RECEPTACLE WITH CLOSED TOP AND PUSH DOOR

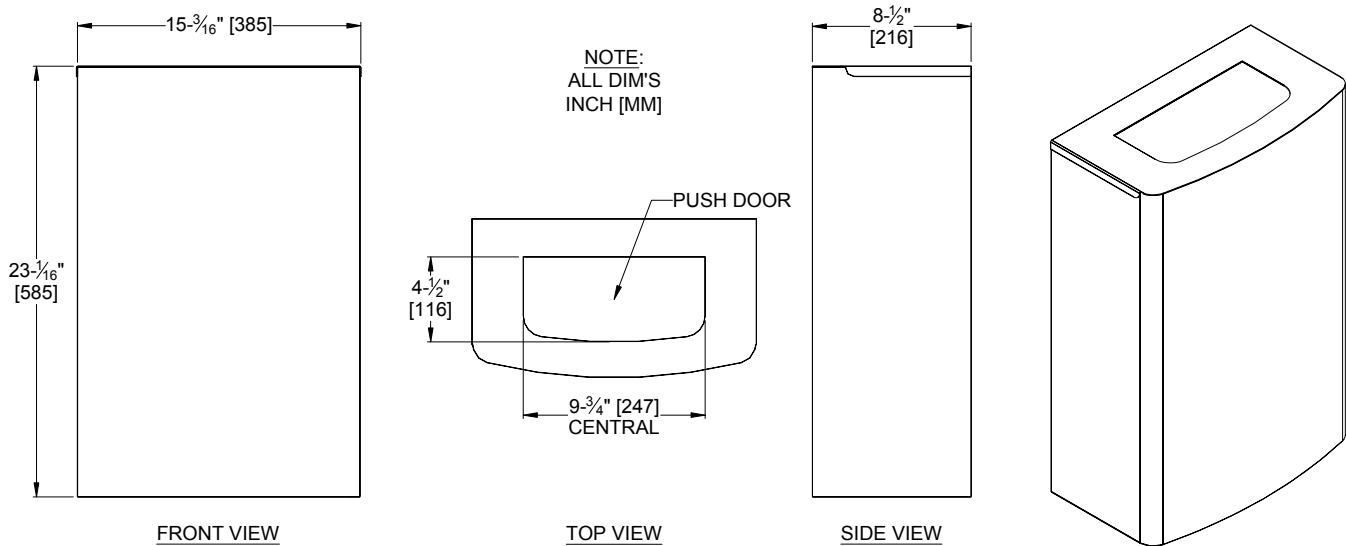

SPECIFICATION

Roval™ Collection Surface Mounted Waste Receptacle with Closed Top and Push Door shall hold 12.8 gallons (48.4 liters) of waste material. Receptacle body shall be formed seamless and shall have bowed front face and gently radiused front vertical edges to provide added strength and complimentary appearance for modern washroom aesthetics. Unit body shall be 20 gauge type 304 stainless steel alloy 18-8. Closed top and push door shall be same grade 18 gauge stainless steel. All exposed surfaces shall have satin finish and be protected during shipment with PVC film that is easily removable after installation. Receptacle full top edge is hemmed with return to inside for user and service safety. Closed top is completely deburred for safety and matches bowed front face and gently radiused front vertical edges of receptacle and is permanently attached to rear wall of unit with full width $\frac{3}{16}$ " diameter ($\varnothing 4.8$) multi-staked stainless steel piano hinge welded to top and back. Push door shall be permanently attached to closed top with three (3) spring loaded $\frac{3}{16}$ " diameter ($\varnothing 4.8$) stainless steel piano hinges welded to top and door. Receptacle shall have four (4) interior hooks for hanging a reusable heavy gauge vinyl liner bag with grommets (by others) and shall have no exposed fastening devices or spot-welded seams. Receptacle shall be screw mounted to wall through keyhole slots with concealed heavy gauge type 304 stainless steel reinforcement straps.

Roval™ Collection Surface Mounted Waste Receptacle with Closed Top and Push Door shall be Model № 20826-T of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For general utility mount the receptacle 28" to 40" (711 to 1016) above finished floor (AFF) from top of unit. Hang unit on wall with four (4) pre-installed screws (by others) through the mounting keyhole slots provided into suitable wall reinforcements (by others).

OPERATION

User deposits waste material through opening in closed top by pushing spring loaded door. Maintenance schedule determines trash removal cycle. Unload unit by lifting hinged closed top and removing either the disposable bag or reusable liner bag (both by others) to empty into appropriate bulk collection container.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROLS, INC.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE