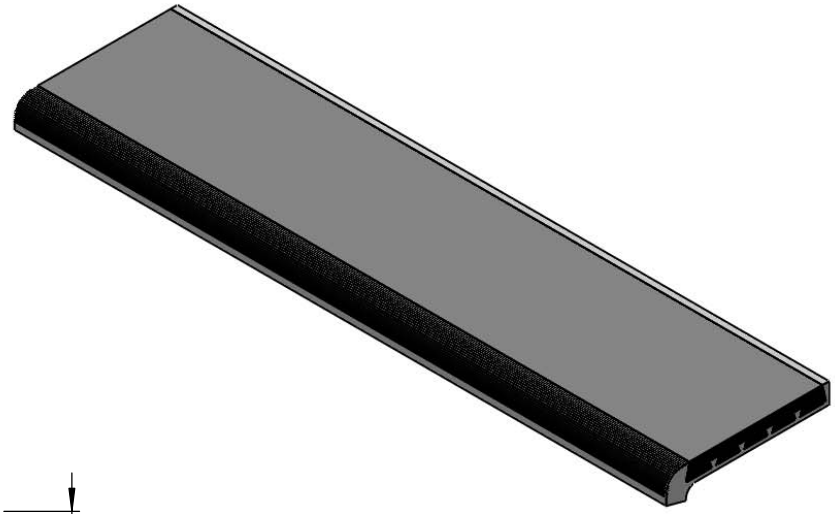

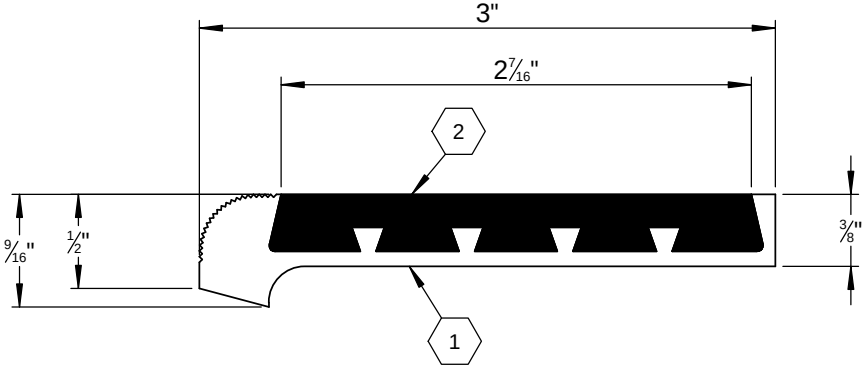

MODEL BSTSF-C3D

(SINGLE STAGE FULL ABRASIVE)

SPECIFICATIONS:

1. **BASE**: EXTRUDED ALUMINUM ALLOY 6063 T-5
2. **ABRASIVE**: ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
3. **BASE FINISH:** MILL
4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE
6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF, LUMINESCENT
7. **LENGTH:** 12'0" MAXIMUM
8. COUNTER SUNK HOLES PRE-DRILLED FOR A #10 FASTENER SPACED 3" FROM ENDS AND APPROXIMATELY 12" TO 15" O.C.
9. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

LENGTH	QTY	COLOR

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART#:				BSTSF-C3D	
babcockdavis 9300 73rd Avenue North Brooklyn Park, MN 55428				TITLE: Stair Tread, Full Abrasive, Short Nose, Alum, Drilled Single Stage	
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	DKL	6/14/17	A	BSTSF-C3D	A
RELEASED	DT	6/14/17	WEIGHT: 1.50 LB		SHEET 1 OF 1