

Model 227 — Recessed
Model 227-10 — Semi-Recessed
(recesses 3½"; projects 95/16")
Model 227-11 — Surface-Mounted
(projects 12 ¹³ / ₁₆ ")

Standard Series — Satin Finish

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ½" return.

DOORS: 18 gauge stainless steel with full length piano hinge and tumbler lock keyed like other Bradley units.

TOWEL DISPENSER: furnished (manufactured by others).

WASTE CONTAINER: 22 gauge stainless steel. All welded construction. Secured to cabinet with tumbler lock keyed like other Bradley units.

LINER (optional): heavy duty stitched vinyl coated nylon. Part # P11-001.

Capacity

Towel Dispenser — one standard core 8" or 9"W x 800'L roll paper towel. Waste Container — 18 gal. (2.5 cu. ft.)

Operation

Towel dispenser delivers preset length of towel (2½", 4" or 5" per stroke). Receptacle removable for servicing by unlocking waste container. Operates with less than 5 lbs. of force.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15%"W x 54%"H x 10%"D (Semi-recessed unit only 3%" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units must have holes drilled by installer.

Guide Specification

Recessed combination towel dispenser and waste receptacle shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish. Towel cabinet door equipped with piano hinge and secured by tumbler lock. Towel dispenser shall be activated with less than 5 lbs. of force and have the capacity to hold one standard core 8" or 9"W x 800'L roll paper towel. Removable 18 gal. stainless steel waste receptacle. Reusable vinyl liner is available separately. Order part number P11-001.


Overall dimensions: 171/8"W x 56"H x 1213/16"D.



Optional Features

	Suffix	
	Hinged cover	-35
	Hinged cover with push flap door	-65



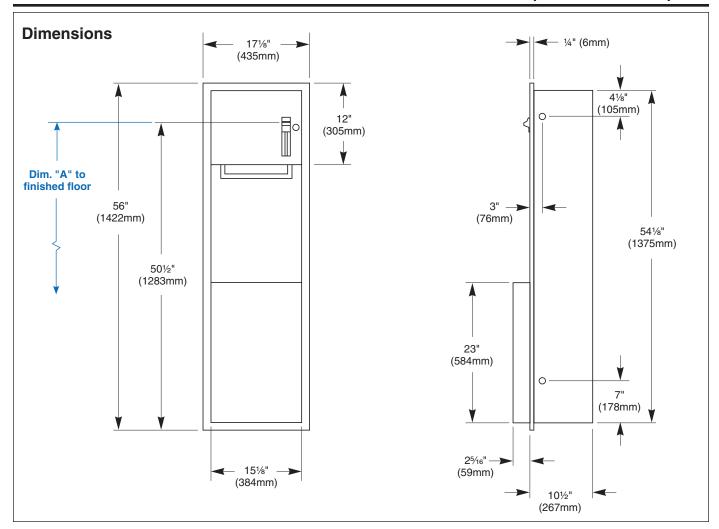

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening			
Actuator top to finished	54" (1372mm)	58¾" (1492mm)	41/8" (105mm)			
floor	52" (1321mm)	56¾" (1441mm)	21/8" (54mm)			
Rough wall opening:						
Surface Mount:	No rough opening, see overall dimensions 15%" (397mm) Wide x 54%" (1388mm) High x 10½" (267mm) Deep					
Recessed:						
Semi-Recessed:	mi-Recessed: 15%" (397mm) Wide x 54%" (1388mm) High x 3½" (89mm) Deep					